

# Ikegami

## GF™ SERIES LINE UP / Accessories

### New GF Products Debut!

Two new powerful tools in the GF series, offer high performance, cost-effective solutions for many different tapeless applications.

New compact design flash memory recorder is suitable for both in-house and field operations.

#### GF™ STATION PORTABLE

- Compact and lightweight HD/SD recorder (half-rack size and 3RU height)
- Recording and playback in the MPEG2 HD422 format
- Thumbnail search function
- PLAYLIST editing capability

New compact player provides multi-format playback flexibility.

#### GF™ PLAYER

- Compact and lightweight HD/SD player (half-rack size and 2RU height)
- Two channel SDI outputs (HD/SD switchable)
- DC Operation.

### New Cost Effective Fiber Optic Transmission System

#### Fiber System Component

- The optical fiber transmission system maintains high camera picture quality across cable runs of up to 6561feet (2000meters) with FE-C10/B10 or FE-C100A/B100A
- The CCU is equipped with HD/SD-SDI outputs, intercom, tally, and return signal inputs.
- High output power supply (max.100W) allowing for HDS-V10 GFCAM™ and accessories.
- LINK MONITOR provides information about signal communication status between camera adapter and CCU.
- RCP-50B remote control panel connection capability.

### Useful Application Software

GF application software can help to manage file based contents recorded by the GF series.

#### GF™ MediaManager

- Media content management software
- Copy from GFPAK™ to other storage (all clips or selected clips)
- Clip search function using metadata keywords
- Easy classification of clips by metadata






# GF<sup>TM</sup> STATION PORTABLE GF<sup>TM</sup> PLAYER

## Performance

		GFSTATION PORTABLE	GFPLAYER			GFSTATION PORTABLE	GFPLAYER	
●Inputs	HD/SD-SDI	1	—	●Others	eSATA	1	1	
	AES/EBU	2	—		Gbit	1	1	
	Genlock(GL)	1	1		TBC	1	—	
	Time Code (TC)	1	—		Indicator	(Amphenol 20-pin) 3.5-inch LCD	VFD Monitor	
	Analog Audio	2 (L/R: 1ch each)	—		●Function	Playlist sequential Playback	○	○
●Outputs	HD/SD-SDI	2 (1ch, With Superimpose)	2	Playlist Editing		○	—	
	SD-SDI	1 (With Superimpose)	1 ※Future Option	Jog & Shuttle Search		○	○	
	Analog composite	1 (With Superimpose)	1 ※Future Option	Copy Function		○	—	
	AES/EBU	2	1	Proxy Generation		○	—	
	Audio Monitor	2 (L/R: 1ch each)	2 (L/R: 1ch each)	Recording		○	—	
	Genlock(GL)	1 (Loop Thru)	1 (Loop Thru)	Playback		○	○	
	Time Code (TC)	1	—	External Control		SONY	SONY	
	Head Phone	1 (Stereo Mini Phone Jack)	1 (Stereo Mini Phone Jack)	Salvage Function		○	—	
	Analog Audio	2 (L/R: 1ch each)	—	File Share Function		○	○	
	DVI-D	—	1	Soft Update		○	—	
	Speaker	1	—	Up/Down Conversion		○	○	
	●Others	USB	1 (A Terminal)	1		GFPAK Removal	Manual	Manual
		RS422A	1	1		Superimpose Playback	○	—
						●Dimensions	W210 × H126 × D400mm ※Excluding Protrusion	W210 × H88 × D350mm ※Excluding Protrusion

### for Studio Application

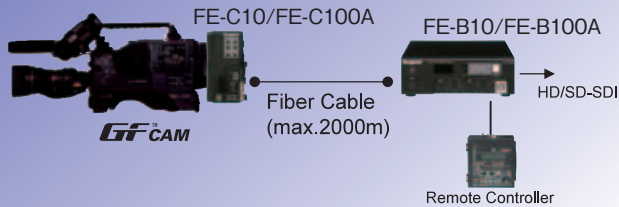


### for Preview



### for Field Recording



### for Media Management

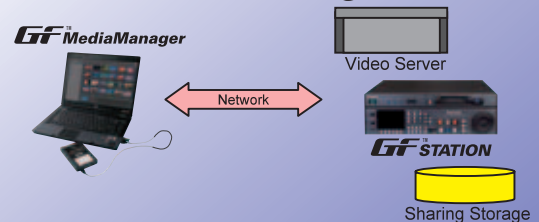

Ikegami Tsushinki Co.,Ltd.

■ URL: <http://www.ikegami.co.jp/en/>

H167A095-HI-SELF5 Printed in Japan

■ Head Office

5-6-16 Ikegami, Ohta-ku, Tokyo 146-8567, Japan TEL.03-5700-1111/FAX.03-5700-1137

■ Overseas Sales Division

5-6-16 Ikegami, Ohta-ku, Tokyo 146-8567, Japan TEL.03-5700-4114/FAX.03-5748-2200

Ikegami Electronics (Europe) GmbH

■ URL: <http://www.ikegami.de>

■ Headquarters

Ikegami Strasse 1, D-41460 Neuss, Germany TEL.02131-1230/FAX. 02131-102820

■ U.K. Branch

Unit E1 Cologne Court, Brooklands Close, Windmill Road, Sunbury-on-Thames, Middlesex TW16 7EB, England TEL.01932-769700/FAX.01932-769710

■ Denmark Office

Horkaer 7-9, 2730 Herlev, Denmark TEL.3880-9903/FAX.3881-9903